



Vantage Point

The DCS Vantage Point Kiosk is a sleek and elegant touch screen system ideal for self service applications. It offers all the functionality and features of a traditional cabinet kiosk with a slim profile.

The Vantage Point stand is constructed from vandal resistant steel and may be manufactured in any color to give the kiosk a high brand. An acrylic overlay may be mounted to the kiosk front.

The system can be manufactured in stainless steel with increased corrosion protection. Optional devices include barcode scanners, stereo speakers, magnetic swipe readers, tamper and moisture resistant keyboards, digital video cameras, badge readers and scanners. The system can support receipt, ticket and full size printers.



MALLS



STADIUMS &
AMUSEMENT PARKS



TRANSPORTATION



MUNICIPALITIES
& UNIVERSITIES



HOSPITALITY

Self Check-In • Interactive Wayfinding/Directories • Bill Payment • Ticketing Kiosk



Vantage Point Light

The DCS Vantage Point Light is a sleek and elegant touch screen system ideal for self service applications. Uses a standard open architecture designed to run software and applications from independent software vendors or your in-house team.

Reliable, cost effective solution ideal for easy, rapid, and widespread installation. Vantage Point is a fully integrated kiosk system that does not require any on-site assembly, cabling or wiring.

The Vantage Point provides robust and responsive multimedia computing for a dynamic interactive experience. With fast processing power full screen video and high quality sound the kiosk is ideal for self service applications.



MALLS



**STADIUMS &
AMUSEMENT PARKS**



TRANSPORTATION




**MUNICIPALITIES
& UNIVERSITIES**



HOSPITALITY

Interactive Directory • Keep Wayfinding • HR Kiosk • Interactive Information

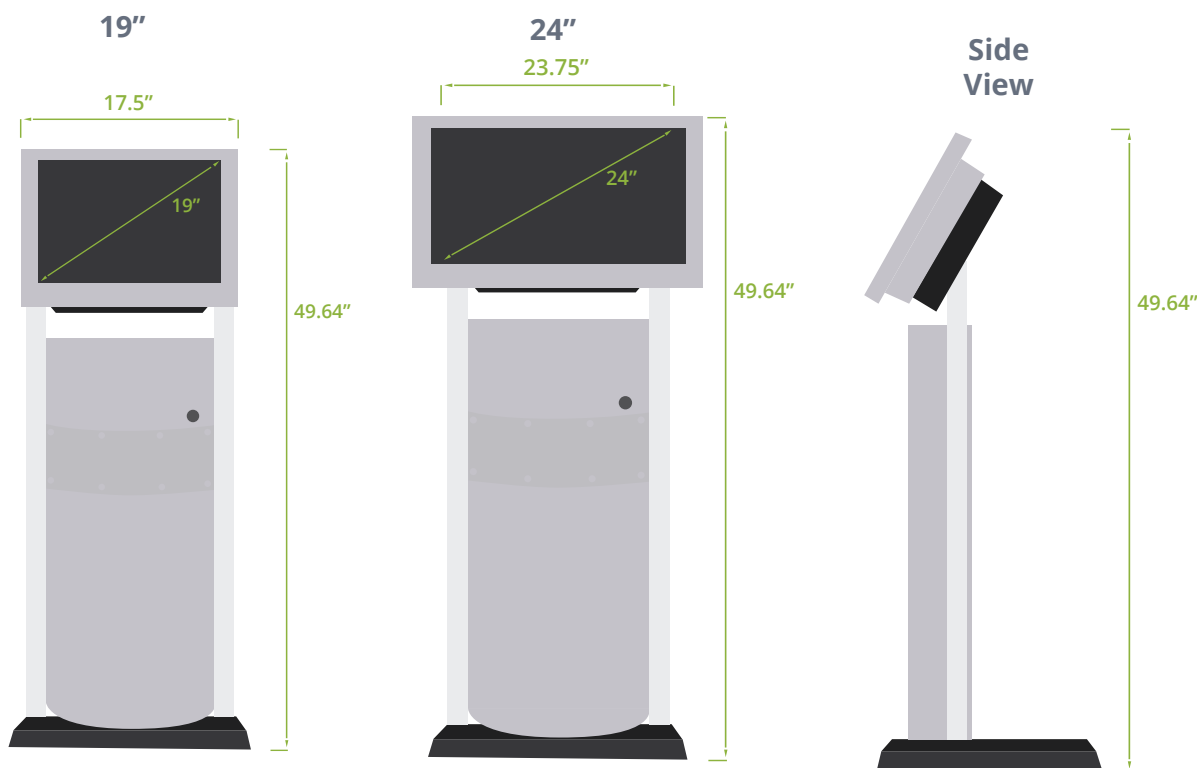

KIOSK PC		
Operating System	Windows 10	
CPU	i5	
RAM	8GB	
Storage	128GB SSD	
Connectivity	Hard Wire or Wi-Fi (included)	
Audio	Intergrated Stereo Speaker	
SPECIFICATIONS	19"	24"
Max Resolution	1280x1024	1920x1080
Aspect Ratio	4:3	16:9
TEMPERATURE	32°F to 120°F (Operational)	
CERTIFICATION	CE/FCC/RoHS	
WARRANTY	One Year On-Site Support; Extended Warranties Available	